
.....

PSS/PS/PSM/FB/FS Series

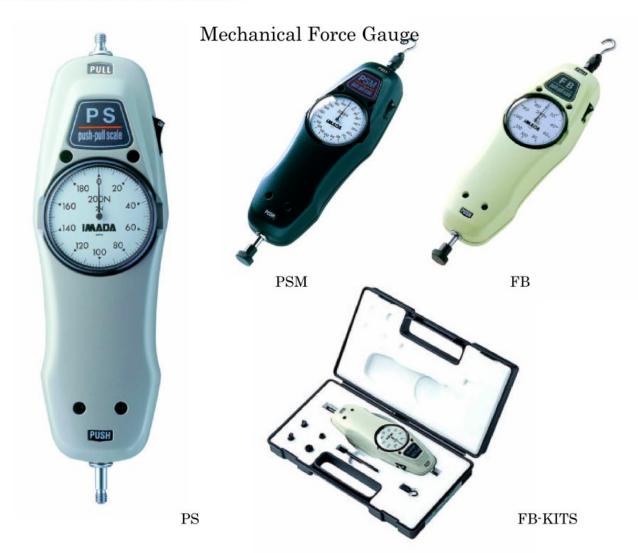

[Application]

Measuring of the contact pressure for touch panel or keyboard

Measuring of the bonding strength of adhesive tapes and the peel strength of adhesive sheets

*Digital force gauges are more suitable for measuring rapid change of the force such as impact test

[Feature]

All models are equipped with Peak Hold function which captures peak force.

Zero adjustment function for tare weight allows the adjustments of attachment's weight.

[PSS/PS/PSM/FS/FB Series Specification]

| Model | PSS | PS | PSM | FS | FB |
|-------------------|----------------------------------|----|----------------|--------|-------|
| Stroke | 10 mm | | | | |
| Measuring units | Refer to the following tables | | | | |
| Display features | Track and peak mode (Selectable) | | | | |
| Graduation | 100 lines* 200 lines ** | | 100lines * | | |
| Accuracy | +/-0.1% of F.S | | +/-0.3% of F.S | | |
| Operating | 0~+40 degree Celsius | | | | |
| temperature range | | | | | |
| Weight | 530 g | 60 | 0 g | 530 g | 600 g |
| Accessories | | | 6 attach | ments | |
| | | | Carryin | g case | |

^{* 120} lines for 3K, 30K, 300N, 30lb, 300K, 300N, 300lb.

^{** 150} lines for 3K, 30K.

[PSS/PS/PSM/FS/FB available models]

1. PPS/PS Series: Highly Accurate, Durable Standard Model PS Series [N unit graduation: 100 lines *120 lines]

| Model | Capacity | Resolution |
|-----------|----------|------------|
| PS-5N | 5 N | 0.05 N |
| PS-10N | 10 N | 0.1 N |
| PS-20N | 20 N | 0.2 N |
| PS-30N * | 30 N | 0.25 N |
| PS-50N | 50 N | 0.5 N |
| PS-100N | 100 N | 1 N |
| PS-200N | 200 N | 2 N |
| PS-300N * | 300 N | 2.5 N |
| PS-500N | 500 N | 5 N |

PSS Series [Kg unit graduation: 100 lines *120 lines] Note 1)

| Model | Capacity | Resolution |
|----------|----------|------------|
| PSS-0.5K | 500 gf | 5 gf |
| PSS-1K | 1 kgf | 10 gf |
| PSS-2K | 2 kgf | 20 gf |
| PSS-3K * | 3 kgf | 25 gf |

PS Series [Kg unit graduation: 100 lines *120 lines] Note 1)

| Model | Capacity | Resolution |
|----------|----------|------------|
| PS-5K | 5 kgf | 50 gf |
| PS-10K | 10 kgf | 10 gf |
| PS-20K | 20 kgf | 20 gf |
| PS-30K * | 30 kgf | 25 gf |
| PS-50K | 50 kgf | 500 gf |

PS Series [lb unit graduation: 100 lines *120 lines] Note 1)

| Model | Capacity | Resolution |
|-----------|----------|------------|
| PS-5lb | 5 lb | 0.05 lb |
| PS-10lb | 10 lb | 0.1 lb |
| PS-20lb | 20 lb | 0.2 lb |
| PS-30lb * | 30 lb | 0.25 lb |
| PS-50lb | 50 lb | 0.5 lb |
| PS-100lb | 100 lb | 1 lb |

Note 1)

Prohibited to sell Japanese market due to Japanese Measurement standard law.

2. PSM Series: High-Resolution Scale Precision Type PSM Series [N unit graduation: 200 lines **150 lines]

| Model | Capacity | Resolution |
|------------|----------|------------|
| PS-20N | 20 N | 0.1 N |
| PS-30N ** | 30 N | 0.2 N |
| PS-50N | 50 N | 0.25 N |
| PS-100N | 100 N | 0.5 N |
| PS-200N | 200 N | 1 N |
| PS-300N ** | 300 N | 2 N |
| PS-500N | 500 N | 2.5 N |

PSM Series [kg unit graduation: 200lines **150 lines] Note 1)

| Model | Capacity | Resolution |
|-----------|----------|------------|
| PS-2K | 2 kgf | 10 gf |
| PS-3K | 3 kgf | 20 gf |
| PS-5K | 5 kgf | 25 gf |
| PS-10K | 10 kgf | 50 gf |
| PS-20K | 20 kgf | 100 gf |
| PS-30K ** | 30 kgf | 200 gf |
| PS-50K | 50 kgf | 250 gf |

Note 1)
Prohibited to sell Japanese market due to Japanese Measurement standard law.

3. FB/FS Series: Steady Accuracy, Affordable Price Popular Type FB Series [N unit graduation: 100 lines*120 lines]

| Model | Capacity | Resolution |
|-----------|----------|------------|
| FB-10N | 10 N | 0.1 N |
| FB-20N | 20 N | 0.2 N |
| FB-30N * | 30 N | 0.25 N |
| FB-50N | 50 N | 0.5 N |
| FB-100N | 100 N | 1 N |
| FB-200N | 200 N | 2 N |
| FB-300N * | 300 N | 2.5 N |
| FB-500N | 500 N | 5 N |

FS Series [kg unit graduation: 100 lines *120 lines] Note 1)

| Model | Capacity | Resolution |
|---------|----------|------------------|
| FS-1K | 1 kgf | 10 gf |
| FS-2K | 2 kgf | $20~\mathrm{gf}$ |
| FS-3K * | 3 kgf | 25 gf |

FS Series [kg unit graduation: 100 lines *120 lines] Note 1)

| Model | Capacity | Resolution |
|----------|----------|------------|
| FB-5K | 5 kgf | 50 gf |
| FB-10K | 10 kgf | 10 gf |
| FB-20K | 20 kgf | 20 gf |
| FB-30K * | 30 kgf | 25 gf |
| FB-50K | 50 kgf | 500 gf |


FB Series [lb unit graduation: 100 lines *120 lines] Note 1)

| Model | Capacity | Resolution |
|-----------|----------|------------|
| FB-5lb | 5 lb | 0.05 lb |
| FB-10lb | 10 lb | 0.1 lb |
| FB-20lb | 20 lb | 0.2 lb |
| FB-30lb * | 30 lb | 0.25 lb |
| FB-50lb | 50 lb | 0.5 lb |
| FB-100lb | 100 lb | 1 lb |

Note 1)

Prohibited to sell Japanese market due to Japanese Measurement standard law.

[Dimension]

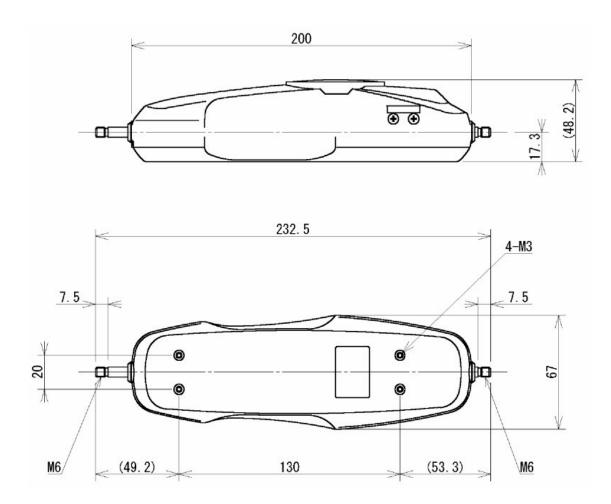

[Precautions]

- *Do not apply excess force, torque, or impact on the measuring shaft.
- *Do not use the gauge under the condition of the rapid temperature changes, high temperature, high humidity, near water and dusty place.
- *Keep the gauge in the exclusive carrying case when it is not used.
- *The use of the test stand made by Imada is recommended for the stable measuring result.
- *All information is subject to change without prior notice.